

In-Dash MP3 Player and Receiver with Flip-Down Faceplate

NCA-611



Instruction Manual

Please read carefully before use and keep for future reference.

Important Safety Information

READ THIS MANUAL THOROUGHLY BEFORE USING THIS UNIT. KEEP THIS MANUAL FOR FUTURE REFERENCE.

Precautions & Warnings

- To reduce the risk of fire, electric shock, and interference, do not attempt to repair this unit yourself. Refer all service to a qualified technician.
- Some MP3/WMA files may not be playable.
- Keep the volume at a reasonable level to avoid distracted driving. High volume levels may make it difficult to concentrate on traffic and road conditions while driving.
- If the car has been in direct sunlight for an extended period, you may need to reduce the temperature inside the car before turning on and using the unit.
- If the battery is disconnected, discharged, or changed, the preset memory of the unit will be lost and require reprogramming.
- The unit is designed to be installed in a level, horizontal position. For optimal performance, avoid installing the unit at an angle.
- Never use excessive force when removing or attaching

- the faceplate. Do not tightly grip the display and buttons to avoid damage.
- ALWAYS LOWER THE VOLUME BEFORE TURNING OFF THE UNIT OR SWITCHING THE IGNITION OFF.

Page 2 Naxa Electronics

Table of Contents

Important Safety Information	2	Warnings and Precautions	13
Thank You	4	Specifications	1!
In the Box	4	Support	1
At a Glance	5		
Electrical Connections	7		
Installation Guide	8		
Installation Procedures	8		
Installation Opening	8		
Attaching the Faceplate to the Chassis			
To detach the faceplate:	10		
Remote Control	11		
Troubleshooting	12		

Thank You

We know you have many choices when it comes to technology; thank you for choosing us here at Naxa Electronics. Established in 2001 in Los Angeles, California, we are dedicated to delivering products that entertain and delight.

We trust that you will be happy with your purchase. Please read this manual carefully and save it for reference. You may also find the latest FAQ, documentation, and other product material at our website. Come visit us on the web at www.naxa.com and see all that we have to offer!


In the Box

Please take a moment to make sure that you have everything in the list below. Although we make every effort to ensure that each Naxa device is securely packed and sealed, we know a lot can happen in between us and you. If anything is missing, check back with your local retailer to get immediate assistance. If they cannot help you, please contact our Naxa Support team at www.naxa.com/naxa_support.

- NCA-611 main unit & faceplate
- Faceplate case
- Remote control
- Installation kit

Page 4 Naxa Electronics

At a Glance

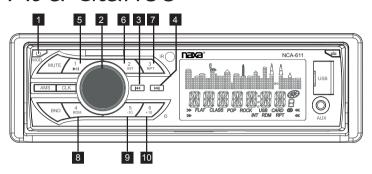


1	U/ MODE	Power. Press to turn the unit on and to change the active source mode: Radio, USB, CARD, AUX IN. (USB & CARD modes are only available when media is detected by the player.) Press and hold to turn the unit off.
2	Volume/	Potate to adjust the volume level

2 Volume/ Options Rotate to adjust the volume level.

Press to cycle through the options menu and rotate the dial to adjust the options: Bass, Treble, Balance, Fader, EQ off, Loud, Loc, Stereo, Vol.

n.
ıy.
le.
de.
1

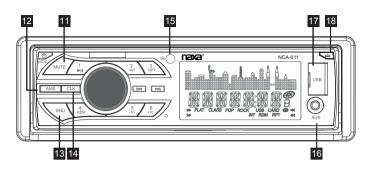

	11	MUTE	Press to temporarily disable/restore the sound.
--	----	------	---


12 AMS

USB/CARD: Press to enter track search mode, then rotate the volume dial to scan through the track.

Radio: Automatic Memory Save. Press to scan for the strongest radio station signals and automatically save them to preset memory. The radio can save up to 6 stations.

13	BAND	Press to change the radio band (FM1, FM2, FM3, AM1, AM2).
14	CLK	Clock. Press once to display the time. Press and hold to set the time.
15	IR	Remote sensor.
16	AUX connector	AUX mode. 3.5mm stereo connection for devices with 3.5mm line-out or head-phone output.
17	USB port	USB mode. Load USB memory sticks here. The USB port is designed for media play- back from flash memory devices. It is not designed to charge high-power devices.
18	Release	Press to flip down the front panel in order to access the SD slot, reset the unit, or to remove the faceplate.

Page 6 Naxa Electronics

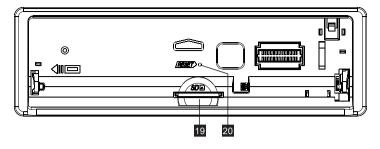


19 SD card slot

SD mode. Load an SD memory card here.

20 RESET

Press to reset the system. All options will return to their factory default settings. Press RESET if the display is frozen or the system is otherwise unresponsive.

Electrical Connections

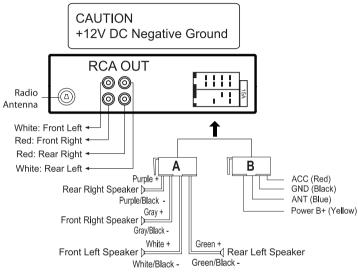


Installation Guide

Installation Procedures

First complete the electrical connections, and then check to make sure everything is secure and correct.


Installation Opening

This unit can be installed in any dashboard having an opening as shown below.




The dashboard must be 4.75-5.56mm thick in order to be able to support the unit.



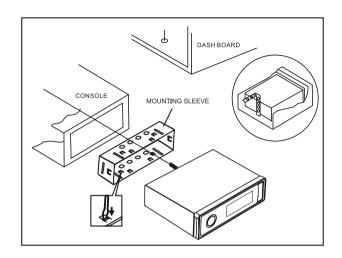


Insert the mounting sleeve into the dashboard and bend the mounting tabs out with a screwdriver. Make sure that the lock lever (**) is flush with the mounting collar and is not projecting beyond.

Page 8 Naxa Electronics

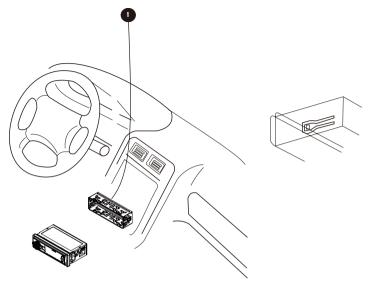



Attaching the Faceplate to the Chassis

- 1. Align the indentation on the right of the faceplate with the right "bulge" of the chassis.
- 2. Slide the faceplate in and hold it to the left; at the same time, bring the other end of the faceplate towards the chassis, making sure to align the indentation with the "bulge."

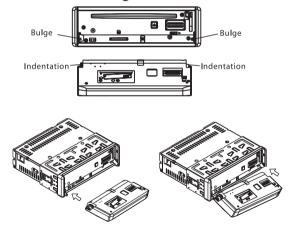


3. Flip the faceplate up until it clicks into place and attaches to the chassis.







To detach the faceplate:


1. Press the RELEASE button to flip the faceplate down.





2. Gently push the faceplate to the left to release it from the chassis, then pull it away from the chassis.






Page 10 Naxa Electronics

Remote Control

- 1.Power On/Off
- 2.Mute Button
- 3. Clock Display And Setting Button
- 4.Loudness Button
- 5.AMS Button
- 6.Previous Button
- 7.Preset EQ Function (Flat/Pop/ Rock/Class)
- 8. Mode Selector
- 9. Track Repeat Button & Preset 3
- 10.Intro Play Button & Preset 2
- 11.Local Button
- 12. Volume Control
- 13. Audio Control/Function Selector
- 14 Band Selector
- 15.Stereo Button
- 16.Play/Pause Button & Preset 1
- 17.Next Button
- 18. Random Play Button & Preset 4
- 19,MP3 Track Down Button Preset 5
- 20.MP3 Track UP Button & Preset 6

Note: To operate remote, pull out the plastic from battery compartment at back of remote. Then point remote at unit and start.

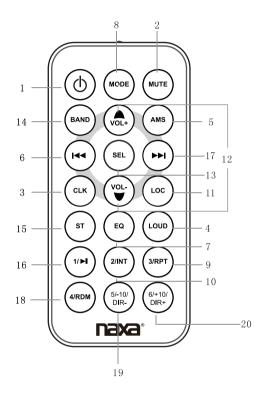

Troubleshooting

If you suspect something is wrong, immediately turn the power off. Do not use the unit while it is exhibiting abnormal behavior (for example, no sound, or if it is smoking and emitting a foul smell). Continuing to use the unit in this state could lead to a fire or electric shock. Discontinue use immediately and contact Naxa Technical Support (www.naxa.com/naxa_support/)..



Never attempt to repair the unit by yourself. There are dangerous, high-voltage components inside.

General

The car's engine switch is not on. Turn your car's ignition switch to "ACC" or "ON."
The unit was not installed securely. Check all of the cables and connections.
The fuse has burned out. Replace the fuse.
The volume level may be set to "0" or MUTE may be enabled.

Radio

There is a lot of static in the broadcast.	The station signal is too weak. Select another station with a stronger signal level.
My saved preset stations have been lost.	The battery/power cable may not be securely connected. Connect the battery cable to the terminal that is always live.

US

	to the terminal that is attracted to the
SB / SD	
The USB or SD card is loaded	The USB or SD card has not been securely loaded. Remove it and try again.
out there is no sound.	The USB or SD card may be damaged, or it may not contain compatible music files. Try another USB drive or SD card, or try loading different files onto it.

Page 12 Naxa Electronics

Warnings and Precautions



CAUTION

WARNING: SHOCK HAZARD. DO NOT OPEN.

AVIS: RISQUE DE CHOC ELECTRIQUE.

NF PAS OLUVRIR



CAUTION: TO REDUCE THE RISK OF FIRE AND ELECTRIC SHOCK, DO NOT REMOVE THE COVER (OR BACK) OF THE UNIT. REFER SERVICING ONLY TO QUALIFIED SERVICE PERSONNEL.



The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of significant magnitude to constitute risk of electric shock



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operation and servicing instructions in the literature accompanying the appliance.

CAUTION

- Do not block the ventilation openings or holes.
- Do not place any naked flames (such as lighted candles) on the apparatus.
- When discarding batteries, follow all local rules and laws governing the disposal of batteries. Consider the environmental impact of your actions!
- To prevent fire or shock hazard, do not expose this appliance to rain or moisture.

WARNING:

This product contains lead, a chemical known to the State of California to cause cancer and birth defects or other reproductive harm. *Wash hands after handling.*

FCC NOTICE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- · Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION ON MODIFICATIONS

Any changes or modifications not expressly approved by the grantee of this device may void the authority granted by the FCC to operate the equipment.

Page 14 Naxa Electronics

Specifications

Installation Options	In-dash, single DIN
Faceplate	Detachable, Flip-down
Display Type	LCD
Disc Support	
Removable Memory Support	USB, SD, SDHC
Playable Media Formats	MP3, WMA
Radio Tuner	AM/FM with digital preset tuning
	AM: 530-1710 kHz
	FM: 87.5-107.9 MHz
Input	3.5mm AUX audio
Power Output (max)	4 audio channels (4 x 25W)
Power Source	DC 12V
Fuse	15 A

Note: Product are improved continuously. We reserve the right to modify the product and specifications without prior notice.

Support

If you have problems with your device, please consult the instructions in this manual. Please also visit us on the web at www.naxa.com to get up to the minute news, alerts, and documentation for your device. For additional assistance, please contact Naxa Technical Support.

NAXA Technical Support

2320 East 49th St. Vernon, CA 90058

http://www.naxa.com/naxa_support/

Page 16 Naxa Electronics